DJDD-503E TOJJE INDUSTRIAL DEHUMIDIFIER



FEATURES AND FEATURES

- World famous brand compressor with safety protection
- LCD display, automatic control accuary ±1% RH.
- Humidity control range 40%-95%RH
- Eco-friendly refrigerant R410a/R407c
- Automatic power on/off according to ambient humidity
- \bullet Timed on/off setting with memory function
- Concealed installation saves space.
- The control system will activate the automatic frost function when frosting.

TOJJE SERVICE

- 1.OEM/ODM orders welcomed, full sets drawings provide within
- 7 days
 2.Precision solution and offer provide within 2 days, fastest response by kinds of communication way
 3.One-to-one unique on-call customer service with 10 minutes

- 3.One-to-one unique on-call customer service with 10 minutes reply rate
 4.1 year warranty for whole unit, allow extend the warranty 2 year after discussion.
 5.Supply spare parts for free if machine damaged because of quality defects.
 6.Provide Ce certificates, quality assurance agreements, technical advice, installation guidance.

In an idea for coverage of Ceiling Mounted Dehumidifier is around 10 sq.m area up to 800 sq.m area with standard floor height 2.6m to 3.6m, so it widely used in home, office, warehouse, electricity room, basement, plant growing workshop and other areas need to be dehumidified.

https://hzshuyi.en.alibaba.com

https://hzshuyi3.en.alibaba.com -

CEILING MOUNTED DEHUMIDIFIER









Our factory

Model number			
DJDD-503E			
Nominal dehumidification	50L/DAY	Power supply	220V/50Hz
Rated input power	850W	Rated input current	3.9A
Circulating air flow	500m³/h	Applying area	20-40m²
Humidity control range	40%-95%	Drainage way	Hose connection
Working Temperature Range	5~38°C	Refrigerant	R410a/R407c
Noise	≤50dB	Compressor type	Rotary
Compressor qty	1pcs	Warranty	1 Year
Electric plug	EU /US standard optional	Certification	CE
Weight	30 ka	Overall size	750 x 455 x 320 mm

Three-view drawing

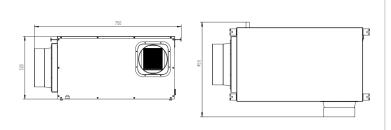

Working principle

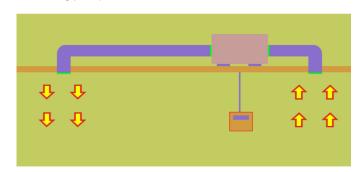

Details Show







